

YOUR TRUSTED
CORROSION-RESISTANT
VALVE INNOVATION EXPERT



ABOUT US

ACADS Engineering is a global provider of LPG and LNG solutions, specializing in gas engineering, equipment supply, and system integration for the oil and gas industry. With a commitment to safety, efficiency, and innovation, we offer high-quality LPG bulk tank fittings, vaporizers, auto changeover systems, telemetry systems, LNG storage tanks, micro bulk solutions, and regulating & metering stations (RMS). We also supply for all types of industrial ball, butterfly, gate, globe, check, diaphragm, plug and control valve. Backed by cutting-edge technology and industry expertise, ACADS Engineering provides tailored solutions and end-to-end support to meet the unique demands of global clients. We prioritize high quality and fast delivery on assorted valve and automation solutions.

Contact us today to explore how we can enhance your business operations.



Add: 4, Jalan industri USJ 1/3, Taman Perindustrian Usj 1, 47600 , Subang Jaya, Selangor
Tel: +60127837767 Email : deric.wong@acads.com.my
www.acads.com.my



ACADS ENGINEERING SDN BHD



ACADS ENGINEERING SDN BHD



ACADS ENGINEERING SDN BHD

LINED BALL VALVE

SIZE: DN15-DN500(1/2" -20")

PRESSURE: PN10-PN25, CL150

BODY MATERIAL: WCB, CF8, CF8M


LINING MATERIAL: FEP, PFA

DESIGN: API, ASME, DIN, GB/T12237

FACE TO FACE: ASME B16.10, HG/T 3704

TEMPERATURE: -60°C-180°C (-75°F-356°F)

ENDS: Flange

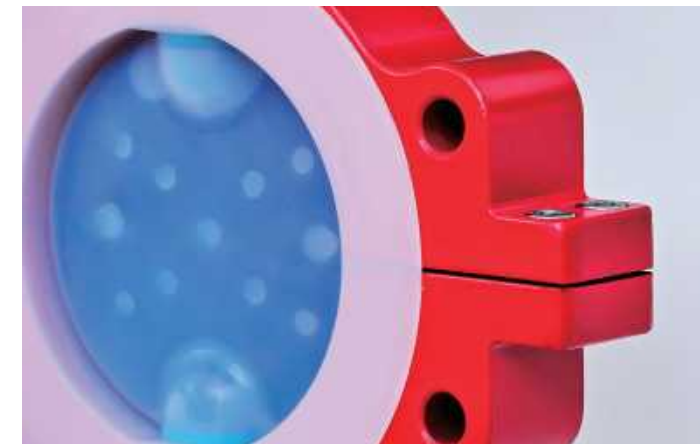

LINED BUTTERFLY VALVE

SIZE: DN50-DN1700(2" -68")

PRESSURE: PN10-PN25, CL150

BODY MATERIAL: WCB, CF8, CF8M



LINING MATERIAL: PTFE, FEP, PFA

DESIGN: API, ASME, DIN, GB/T12238

FACE TO FACE: ASME B16.10, GB/T 12221

TEMPERATURE: -60°C-180°C (-75°F-356°F)

ENDS: Flange, Wafer, Lug

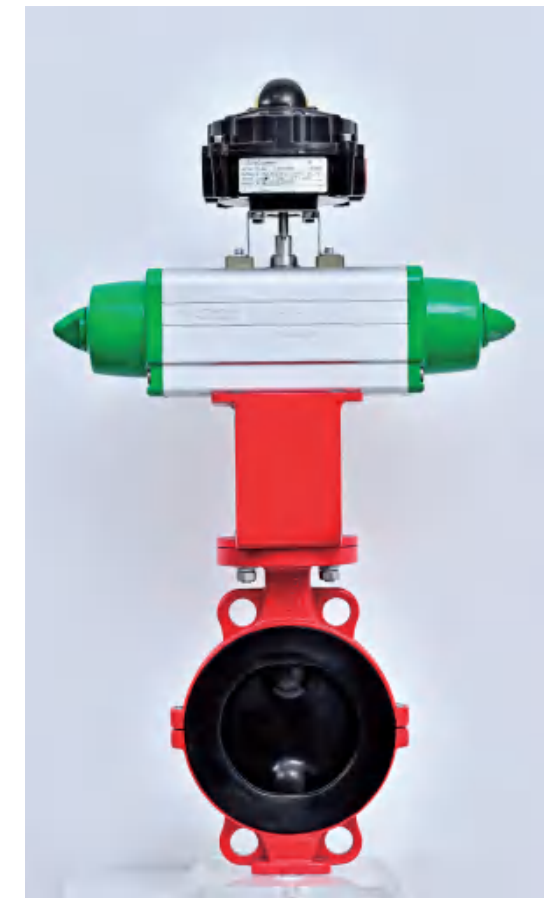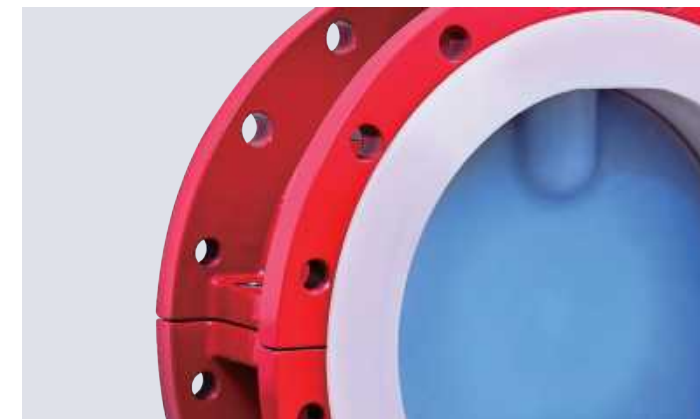



LINED PLUG VALVE

SIZE: DN15-DN300(1/2" -12")
PRESSURE: PN10-PN25, CL150
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: FEP, PFA
DESIGN: API, ASME, DIN, HG/T3704
FACE TO FACE: ASME B16.10, GB/T 12221
TEMPERATURE: -60°C-180°C (-75°F-356°F)
ENDS: Flange

SLEEVE TYPE PLUG VALVE

SIZE: DN15-DN600(1/2" -24")
PRESSURE: PN10-PN63, CL150-CL600
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: PTFE
DESIGN:API, ASME, DIN, GB/T 22130
FACE TO FACE: ASME B16.10, GB/T12221
TEMPERATURE: -60°C-220°C (-75°F-428°F)
ENDS: Flange



LINED SWING CHECK VALVE / BALL CHECK VALVE

SIZE: DN25-DN500(1" -20"), ball up to 3"
PRESSURE: PN10-PN25, CL150
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: FEP, PFA
DESIGN: API, ASME, DIN, GB/T12236
FACE TO FACE: ASME B16.10, GB/T 12221
TEMPERATURE: -60°C-180°C (-75°F-356°F)
ENDS: Flange



ANTI-CORROSION

LINED SINGLE PLATE CHECK VALVE

SIZE: DN25-DN500(1" -20")
PRESSURE: PN10-PN25, CL150
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: FEP, PFA
DESIGN: API, ASME, DIN, GB/T12236
FACE TO FACE: ASME B16.10, GB/T 12221
TEMPERATURE: -60°C-180°C (-75°F-356°F)
ENDS: Wafer



LINED GATE VALVE

SIZE: DN20-DN600(3/4" -24")
PRESSURE: PN10-PN25, CL150
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: FEP, PFA
DESIGN: API, ASME, DIN, GB/T12234
FACE TO FACE: ASME B16.10, GB/T 12221
TEMPERATURE: -60°C-180°C (-75°F-356°F)
ENDS: Flange



LINED DIAPHRAGM VALVE

SIZE: DN15-DN300(1/2" -12")
PRESSURE: PN10-PN25, CL150
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: FEP, PFA
DESIGN: API, ASME, DIN, GB/T12239
FACE TO FACE: ASME B16.10, HG/T3704
TEMPERATURE: -60°C-180°C (-75°F-356°F)
ENDS: Flange



LINED CONTROL VALVE / BELLOWS TYPE CONTROL VALVE

SIZE: DN15-DN200(1/2" -8")
PRESSURE: PN10-PN25, CL150
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: FEP, PFA
DESIGN: Manufacturer Standard
FACE TO FACE: Manufacturer Standard
TEMPERATURE: -60°C-180°C (-75°F-356°F)
ENDS: Flange



LINED DISCHARGE VALVE

SIZE: DN50-DN200(2" -8")
PRESSURE: PN10-PN25, CL150
BODY MATERIAL: WCB, CF8,CF8M
LINING MATERIAL: FEP, PFA
DESIGN: Manufacturer Standard
FACE TO FACE: Manufacturer Standard
TEMPERATURE: -60°C-180°C (-75°F-356°F)
ENDS: Flange

